


SOLENOID VALVES




**IN STOCK AT
JOHNSON VALVES
TEL 023 80 669666**

**EG
GAS SERVICE
NORMALLY CLOSED**

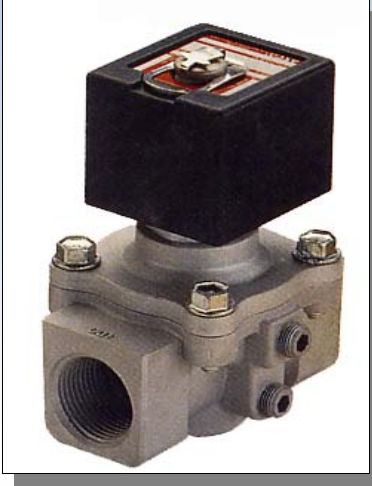


**ASCO JOUCOMATIC
SERIES 262 & 040 - STRAIGHT PATTERN
SERIES 030 - 'Y' PATTERN**

GAS SERVICE APPROVED

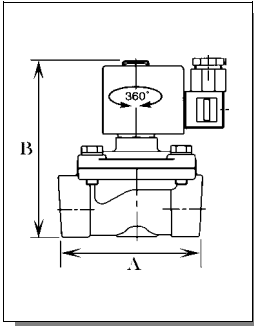

*Series 262 & 040
Minimum pressure 0 bar*

Fig No	BSP	A	B	Orifice Size	MAX PRESSURE BAR		SPARES KIT NO		COIL SIZE	
					GAS		AC	DC	AC	DC
					AC	DC				
EGSCE262C002	1/8	30	65	3.2	2.76	—	K312-984	—	M6-FT	—
EGSCE262C090	1/4	40	75	6.7	2.10	—	K312-979	—	M6-FT	—
EGSCE040B001	3/8	70	98	19	0.086	—	K312-984	—	MXX-FB	—
EGSCE040B002	1/2	70	98	19	0.086	—	K412-984	—	MXX-FB	—
EGSCE040B003	3/4	84	109	19	0.086	—	K312-984	—	MXX-FB	—
EGSCE040A24	1	108	130	23.8	0.086	—	K320-011	—	M12-FB	—

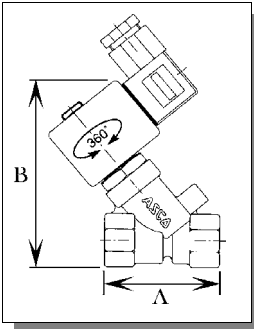

*Series 030
Minimum Pressure 0 bar*

Fig No	BSP	A	B	Orifice Size	MAX PRESSURE BAR		SPARES KIT NO		COIL SIZE	
					GAS		AC	DC	AC	DC
					AC	DC				
EGSCE030B010	3/8	48	88	9.5	0.48	—	K312-981	—	M6-FT	—
EGSCE030A016	1/2	58	96	11	0.14	—	K312-980	—	M6-FT	—

These compact valves with aluminium or brass bodies have soft seating for tight shut off on low pressure service. All valves are direct lift solenoid operated.

For gas pilot and gas burner control on industrial atmospheric and forced draught burners, also used in kilns and furnaces in process industries.

All valves have been type tested to EN161 and satisfy the European gas appliance directive.

All valves are suitable to withstand 150mbar back pressure.

These brass solenoid valves are normally closed: (open when energised and closed when de-energised).

Features and Benefits.

- No minimum operating pressure required.
- All valves cover class A, group 2 service, gas families 1 & 2.
- Coil easily removed with valve in position.
- Spares kits and coils available from stock.

Technical Data.

Temperature range:-
0°C to +60°C

Epoxy moulded coils IP65 rated
Standard voltages
AC 24v/110v/115v/230v

Body material brass (Series 262)
Body material brass (Series 030)
Body material aluminium (Series 040)

NBR (nitrile/buna-n) seals

ASCO JOUCOMATIC AUTHORISED DISTRIBUTOR